


XPEL LUX PLUS™ BLACK is a high performance, self-adhesive, gloss black, clear-coated aliphatic polyurethane film designed to protect automotive paint, and other surfaces, from harmful effects of stone chips and abrasion. It has exceptional elongation properties for ease of application which allows for single piece installations. XPEL LUX PLUS™ BLACK is a very low surface energy film designed to resist staining and offers superior environmental resistance and gloss retention. The clear coat employs special elastomeric polymers that allow scratches in the surface to “heal” over time, eliminating the need for frequent polishing to maintain a just installed appearance. LUX PLUS™ BLACK is coated with ultra-clear high performance acrylic adhesive which has excellent adhesion on a broad range of surfaces, while resisting disturbances during installation. This high performance acrylic adhesive is formulated to resist delamination, will not damage paint or leave behind residue upon removal post installation.

### PRODUCT CONSTRUCTION

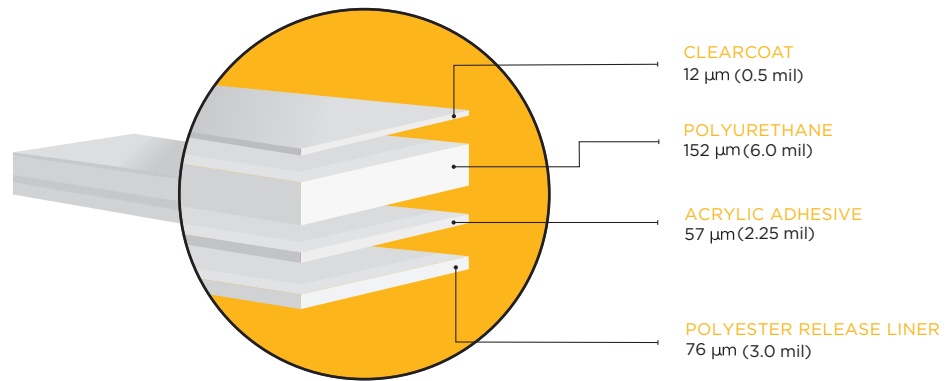


NOMINAL THICKNESS W/O RELEASE LINER  
221 μm (8.75 mil) +/- 10%

GENERAL CHARACTERISTICS			
PROPERTIES	TYPICAL VALUES	TESTING CONDITIONS	STANDARDS USED
<b>Peel Adhesion</b>	>4 N/cm >7 N/cm	20 min. @ Room Temperature 24 hr @ Room Temperature	PSTC 101
<b>Gloss</b>	>90 GU	60 Degree	ISO 2813
<b>Aging Tests</b> Shear T-Peel	>1,440 Minutes >3.5 N/cm	1kg, 0.5" x 1" Mounted, Room Temperature 24 hr at 60°C	XQT212 XQT208
<b>Mechanical</b> Ultimate Strength @ Break Tensile Elongation @ Break Tear Strength	>15 MPa >200% >60 kN/m	Test rate: 20 in/min (500 mm/min) Test rate: 20 in/min (500 mm/min) Die C, 20 in/min (500 mm/min)	ASTM D882 ASTM D882 ASTM D624

## TARGET APPLICATIONS

Gloss Black polyurethane for stone chip protection, high wear, and abrasion in the automotive, motorcycle, RV, powersports, bicycle, and other transportation markets.

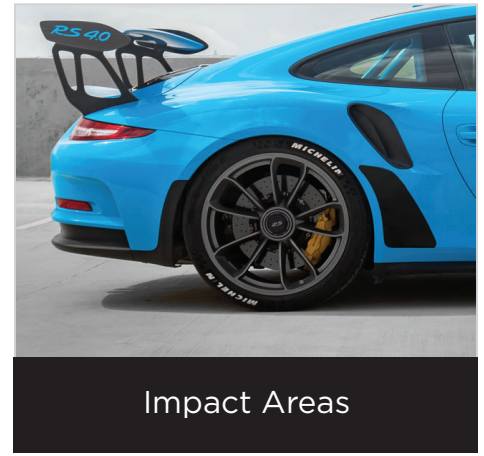

[www.xpel.com](http://www.xpel.com)

Toll Free: (800) 447-9928  
International: +1 (210) 678-3700  
Fax: (210) 678-3701

Notice: The representations of performance and suitability for use contained in this Technical Data Sheet are meant only as a guide. Since only the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product is suitable for that intended use.